


# DIAMOND PRO® STONE CUT™ RETAINING WALL SYSTEM

New Look,  
Legendary Strength.

**NEW**

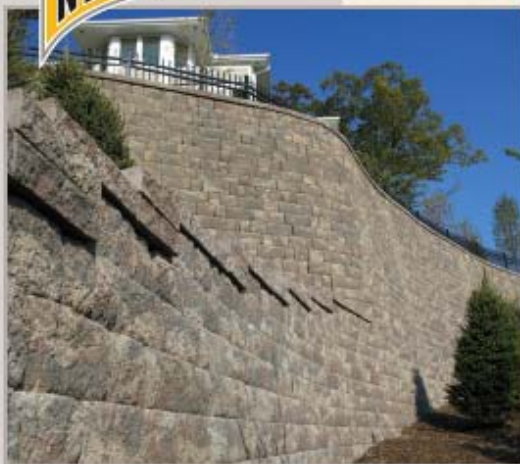

Anchor Wall Systems just made the best engineered wall product even better. Now the Diamond Pro® Stone Cut™ retaining wall system comes in multiple pieces, allowing you to create a more distressed-looking, random appearance. For nearly a decade, contractors, engineers and architects have turned to the Diamond Pro® system for their critical wall needs. With its proven performance and legendary strength, the Diamond Pro system is one of the most specified retaining wall systems in the industry. Now, Diamond Pro Stone Cut offers the same reliability with the beautiful, weathered look of quarried stone in three different sizes. With Diamond Pro Stone Cut, you can enhance the overall aesthetics of any engineered project – commercial, government or residential site-development. And, Diamond Pro Stone Cut features the Anchor Wall Systems patented rear-lip system, ensuring uniform setback, easy installation and proven grid connections that have been hallmarks of the Diamond Pro series for years. Diamond Pro Stone Cut, quite possibly the perfect combination of brawn and beauty.

**Anchor**<sup>®</sup>  
RETAINING WALL SYSTEMS

1-877-295-5415  
[www.anchorwall.com](http://www.anchorwall.com)

# DIAMOND PRO® STONE CUT™ RETAINING WALL SYSTEM



The Diamond Pro® retaining wall system meets the rigorous structural and economic demands required by commercial architects, engineers and contractors. Now the new Diamond Pro® Stone Cut™ pleases the aesthetic wants of designers by creating the weathered look of quarried stone.

No pins. No mortar. No misalignments.  
Our patented rear-lip technology makes  
installation quick, efficient and accurate.



When creating walls with only one size of Diamond Pro® Stone Cut™, we recommend using the 18-inch block for optimum strength and durability.

## Diamond Pro® Stone Cut™

### Product Detail:



Large Unit



Medium Unit



Small Unit

	Large Unit	Medium Unit	Small Unit
Nominal Dimensions*	8" x 18" x 12" (200 mm x 450 mm x 300 mm)	8" x 11" x 12" (200 mm x 275 mm x 300 mm)	8" x 7" x 12" (200 mm x 175 mm x 300 mm)
Approx. Weight	77 lbs. (35 kg)	45 lbs. (20 kg)	34 lbs. (15 kg)
Coverage	1.0 sq. ft. (.090 m <sup>2</sup> )	.601 sq. ft. (.055 m <sup>2</sup> )	.379 sq. ft. (.035 m <sup>2</sup> )
Setback/Batter	1" (25 mm)/7.13°	1" (25 mm)/7.13°	1" (25 mm)/7.13°
Minimum Radius	Varies depending on the block pattern used. Minimum inside radius 4' (1200 mm). Minimum outside radius 7' (21000 mm).		

### Accessories:



C	11	18	7	11	18	7
C	7	11	18	7	11	9*